



# WAMA ELECTRONICS TECH CO.,LTD

---

## 1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion cylindrical battery LIR17650

## 2. Description and Model

2.1 Description	Rechargeable Lithium-ion cylindrical battery
2.2 Model	LIR17650

## 3. Specification

3.1 Capacity	1500mAh
3.2 Charging Voltage	4.20V
3.3 Nominal Voltage	3.7V at 0.2C mA
3.4 Standard Charging Method	Constant current:0.5C <sub>5</sub> mA Constant voltage 4.20V
3.5 Cut-off Discharge Voltage	3.00V
3.6 Max.Discharge Current	1.5C <sub>5</sub> mA
3.7 Max.Charge Current	1C <sub>5</sub> mA
3.8 Cycle Life	>500 cycles
3.9 Ambient Temperature	
for Standard Charge	0°C ~ 45°C
for Discharge	-20°C ~ 60°C
3.10 Storage	
for within the temperature	-20°C ~ 60°C
for within the humidity	≤75%
3.11 Energy Density	
Wh/L	~360
Wh/Kg	~140
3.12 Weight of Bare Cell	~36g
3.13 Charge State Internal Impedance	<80mΩ

## 4.Appearance

Appearance shall be free from any remarkable scratch,flaws, rust, discoloration or electrolyte leakage(visible or by smell)

## 5.Standard Test condition

### 5.1 Environment Conditions

Unless otherwise specified,all test stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH.

---

# WaMa Li-ion Battery Individual Data Sheets

## 5.2 Test Equipment

### (1) Impedance meter

The impedance meter with AC 1kHz should be used


## 6. Test Procedure and Its Standard

Item	Measuring Procedure	Standard
6.1 Appearance	Visual	No Defect and Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Maximum Charge Current	CCCV(Constant Current Constant Voltage)	1C <sub>5</sub> mA
6.5 Full charge	CCCV	CC-0.5C <sub>5</sub> mA CV- 4.2V End-Current 0.01C <sub>5</sub> mA
6.6 Open Circuit Voltage	Within 1hr after full charge,measure Open circuit voltage	>4.10V
6.7 Internal Impedance	Measure the battery with 1kHz AC	<80mΩ
6.8 Discharge Capacity	Within 1hr after full charge,discharge until final discharge,at 0.2C <sub>5</sub> mA and measure the capacity	>1500mAh
6.9 Maximum Discharge Current	Until final discharge voltage	1.5C <sub>5</sub> mA
6.10 Charge/Discharge Cycle Life	Charge:CCCV,CC- 0.5C <sub>5</sub> mA,CV- 4.2V End-Current 0.01C <sub>5</sub> mA Discharge:0.5C <sub>5</sub> mA to 3.00V,This charge/discharge shall be repeated 500 times	Discharge capacity should be >70% of item 6.8
6.11 Leakage Proof	After full charging,the battery shall be stored at 40±2℃ and humidity 80±5%for 21 days	No leakage should be observed by visual inspection
6.12 Temperature Characteristics	1)After full charge at 20±5℃ ,stand at -20±2℃ for 18h,then discharge at 0.2C <sub>5</sub> mA and measure the capacity 2)After full charge at 20±5℃ ,stand at 55±2℃ for 2hrs ,then discharge at 1C <sub>5</sub> mA and measure the capacity	Discharge capacity should be>60% of item 6.8 and no abnormality on its appearance and stucture
6.13 Charge Retension	After full charging,stand at 20±5℃ for 28 days,measure the discharge capacity according to item 6.8	Discharge capacity should be>85% of item 6.8

# WaMa Li-ion Battery Individual Data Sheets


## 7.1 Charge/Discharge Characteristics

Charge:CC/CV 4.2V, 0.5C<sub>5</sub>mA,  
End- current 0.01C<sub>5</sub>mA  
Discharge:0.5C<sub>5</sub>mA Cut-off at 3.00V  
Temperature:25°C

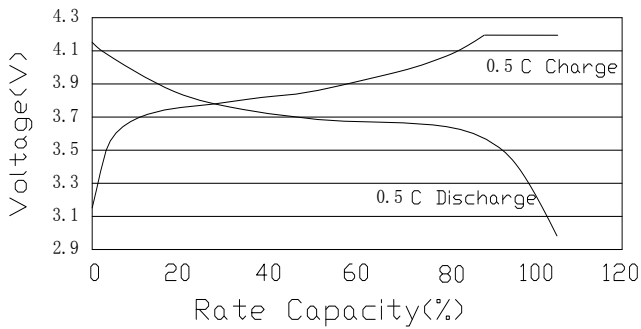


## 7.3 Temperature Characteristics

Charge: CC/CV 4.2V 0.5C<sub>5</sub>mA,  
End-Current 0.01C<sub>5</sub>mA  
Discharge:As item 6.10

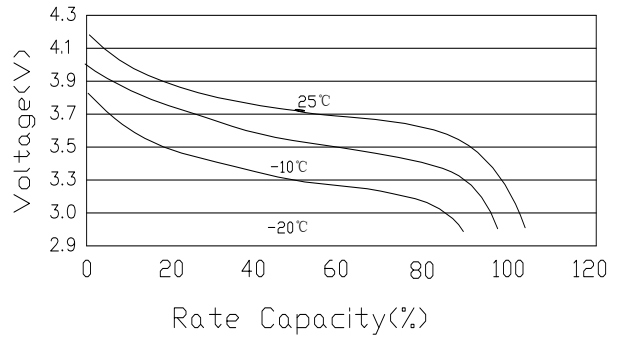

## 7.2 Charge/Discharge Cycle Life

Charge:CC/CV 4.2V, 0.5C<sub>5</sub>mA,  
End-Current 0.01C<sub>5</sub>mA  
Discharge:0.5C<sub>5</sub>mA,Cut-off at 3.00V  
Temperature:25°C

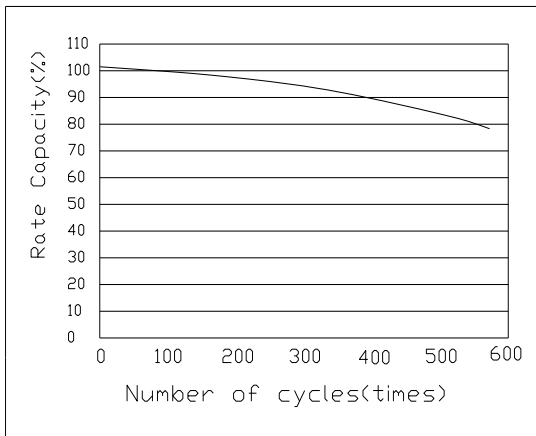

## 8. Dimension(Bare cell) mm

